



# ProStep® Classic



ProStep® Classic is the versatile workhorse of the ProStep® range. Suitable for both new and retro-fit situations. Classic combines a sleek appearance with ease of installation for both internal and external use on any hard surface.



ProStep® Classic, designed with a chamfered and slightly forward leading edge, provides an elegant, soft linear finish to stair treads and combines aesthetics with durability. Ample web and base thickness provide for increased rigidity while maintaining a streamlined appearance and the hard anodised and UV stabilised finish will keep its attractiveness for many years of service.

Used for many years in some of the most demanding applications, such as Birrarung Marr, Melbourne's iconic Yarra River walking trails and on the steps of every tram super stop within the Melbourne CBD. The diversity of applications are testimony to the products enduring strength, reliability and longevity.


## KEY FEATURES

- A stream lined appearance, with strong design parameters, make this product very reliable
- Simple installation and very low on-going maintenance
- Concealed fixing points mean the product cannot be tampered with, making it ideal for public applications
- Available in a choice of 6 rubber (P4) or 3 Carborundum strip insert (P5) colours
- Conforms to all aspects of the relevant Australian standards
- Available in A Series to meet the NCC requirements.


## PROSTEP® CLASSIC FEATURES

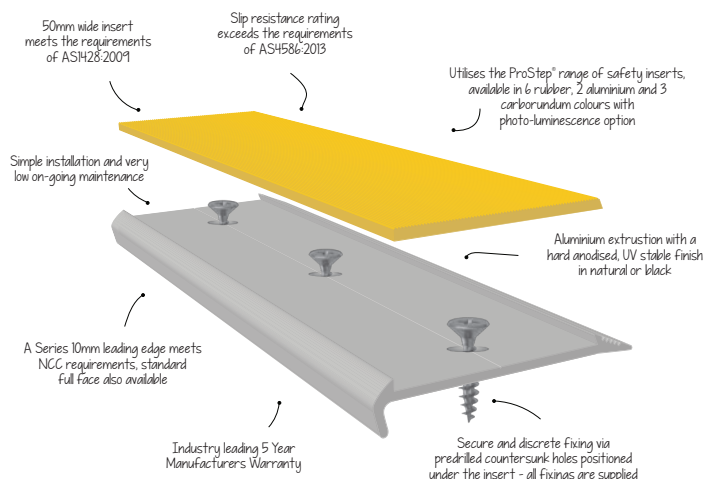

A SERIES 10MM FACE (NCC COMPLIANT) UM002A

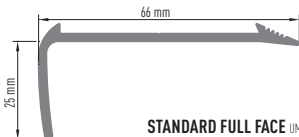

STANDARD FULL FACE UM002



A SERIES RECESSED 10MM UM001

Allow recess of 60mm wide x 5mm deep

## COMPLIANCE

All CTA products conform with the requirements of the Australian standards and are tested by a NATA certified laboratory. Please consult with CTA for relevant test reports:

- AS1428:2009 Design for access and mobility
- AS4586:2013 Slip resistance classifications for new pedestrian surface materials
- NCC - National Construction Codes

## LUMINANCE CONTRAST

Please view the CTA Luminance Brochure for details or contact your CTA representative to discuss or request an onsite luminosity test.

## INSTALLATION

Supplied to length, pre-drilled with screws and PSA backed insert ready for installation.

## MATERIAL

Manufactured from heavy duty tempered aluminium extrusions and milled in a square faced and an anodised finish.

## APPLICATIONS

ProStep® Classic stair nosing is suitable for most internal and external applications. It can be fitted to new or existing concrete, ceramic tiles, timber, carpet (direct stick) and most other hard surfaces.

## DIMENSIONS

10mm face and 66mm wide.  
50mm safety tread insert.  
Supplied to length up to 3.6m.

## PRODUCT OPTIONS

MODEL	SLIP RATING	INSERT	PRODUCT CODE
A Series Recessed (10mm)	P5	Carborundum	UM001-SNCI-XXX
A Series Recessed (10mm)	P5	Egress	UM001-SNCI-PL-XXX
A Series Recessed (10mm)	P4	Rubber - Finline	UM001-SNPI-RIP-XXX
A Series Recessed (10mm)	P4	Rubber - Ridge	UM001-SNPI-ART-XXX
A Series (10mm)	P5	Carborundum	UM002A-SNCI-XXX
A Series (10mm)	P5	Egress	UM002A-SNCI-PL-XXX
A Series (10mm)	P4	Rubber - Fine Line	UM002A-SNPI-RIP-XXX
A Series (10mm)	P4	Rubber - Ridge	UM002A-SNPI-ART-XXX
Standard (25mm)	P5	Carborundum	UM002-SNCI-XXX
Standard (25mm)	P5	Egress	UM002-SNCI-PL-XXX
Standard (25mm)	P4	Rubber - Fine Line	UM002-SNPI-RIP-XXX
Standard (25mm)	P4	Rubber - Ridge	UM002-SNPI-ART-XXX

Where XXX = Insert colour (see below). Also available as a Black extrusion (UM002A160)

## WARRANTY

CTA provides a comprehensive warranty, in accordance with our published warranty statement which can be viewed on [www.ctagroup.com.au](http://www.ctagroup.com.au)

## CTA COMPLETE CARE MAINTENANCE

Asset owners have a Duty of Care responsibility to maintain access product within design performance parameters. CTA offers a fully integrated maintenance program which includes regular scheduled maintenance and replacement of worn components where necessary. Please contact your CTA representative for information on our "Complete Care Program."

## CTA INSTALLERS

CTA's accredited installers are available to do the installation work for you – with short turnaround times and guaranteed workmanship. Our installation team is the largest and most experienced in the nation, so you can rest assured you are in safe hands.

## MORE INFORMATION

Product Installation, list of Approved Products and Material Safety Data Sheets are available on request.

## PROSTEP® SAFETY INSERT SYSTEM

The ProStep® family of safety stair edging utilises a common insert system. Once a suitable profile has been selected, the insert that best fits the application is chosen, with variations in colour, anti-slip rating, durability and style. Please see the ProStep® Safety Insert System Data sheet for images and more information. **Call 1300 282 282 to request a sample.**

	Carb	Egress	Ridge	FineLine
AS4586 Rating	P5	P5	P4	P4
Material	Carborundum	Carborundum & Photo-Luminescent	Rubber	Rubber
Colours	Yellow / Grey / Black	Yellow / Grey / Black	Yellow / Grey / Black Ivory / Terracotta / Pacific Blue	Yellow / Grey / Black Ivory / Terracotta / Pacific Blue
Warranty / Life Expectancy	5 Years / 10+ years	5 Years / 10+ years	5 Years / 10+ years	5 Years / 10+ years

**YELLOW<sup>112</sup>**

**GREY<sup>155</sup>**

**BLACK<sup>160</sup>**

**IVORY<sup>108</sup>**

**TERRACOTTA<sup>124</sup>**

**PACIFIC BLUE<sup>135</sup>**

**CALL CTA ON 1300 282 282**  
**TO ARRANGE A MEETING WITH A SALES CONSULTANT**

VICTORIA | NEW SOUTH WALES | QUEENSLAND | WESTERN AUSTRALIA

THE INFORMATION IN THIS BROCHURE IS CORRECT AT THE TIME OF PRINTING. THE CONTENTS OF THIS DOCUMENT REMAIN THE PROPERTY OF CTA AUSTRALIA PTY LTD. AND ARE PROVIDED FOR CTA CUSTOMERS ONLY. ALL INFORMATION INCLUDING ALL TEXT AND IMAGES MUST NOT BE COPIED WITHOUT PRIOR APPROVAL IN WRITING FROM CTA AUSTRALIA PTY LTD.

**CTA**  
WWW.CTAGROUP.COM.AU